

NYX-88 Firmware update

Using Web Browser

Download the latest firmware file from the link below

> [NYX-88 Firmware](#)

> **Connect with your PC to NYX-88 Hotspot SSID Network.**

The default access point credentials are:

Name (SSID)	Password
Nyx88_XXXXXX	12345678

(if you have the mount already connected to your home network then proceed below)

Open your Edge, Chrome, Safari or Firefox browser and goto


> <http://nyx88.local/update>

(if you cannot access **nyx88.local** due to your network restrictions you can use the mount's IP address which can be found in Unity platform NYX-88 dashboard)


If you are asked to authenticate, use the following credentials to access the firmware update page.

user: **admin** and password: **12345678** (same as the hotspot password)


After authentication you will see the page below:

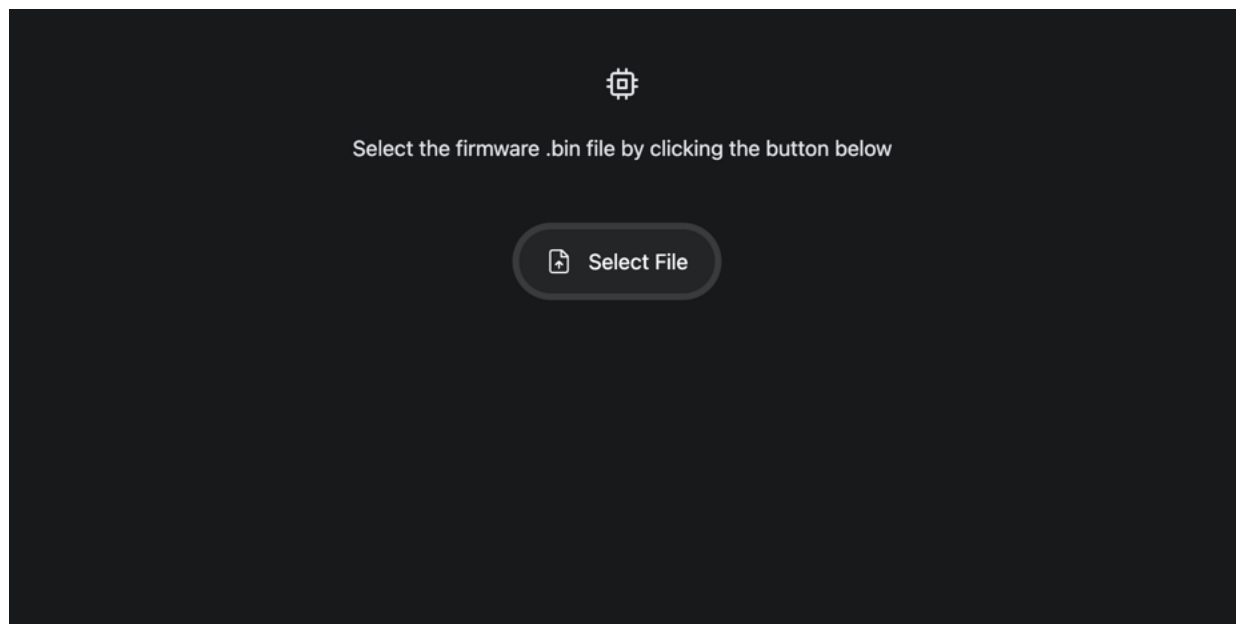

Click "**Select File**" button and upload the firmware file you have previously downloaded.

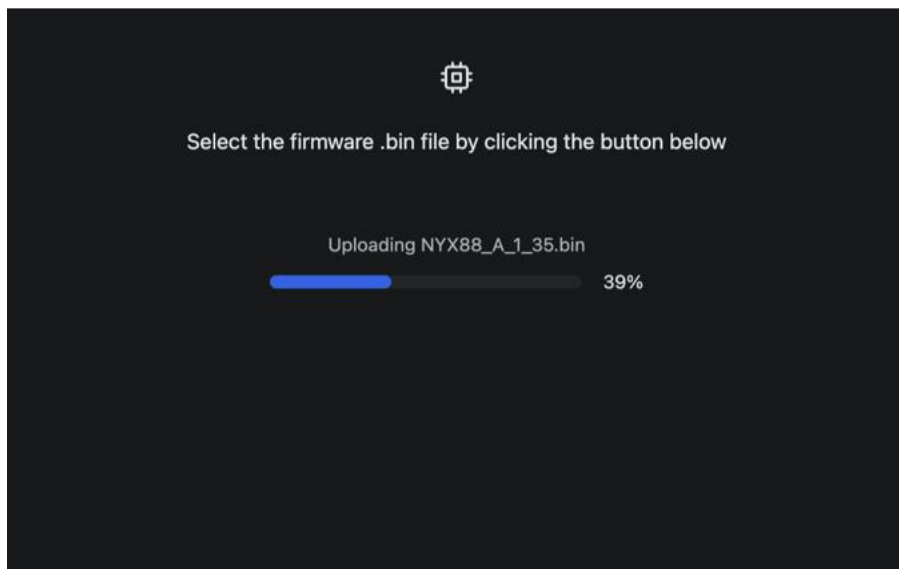

Wait for the firmware update process to finish.

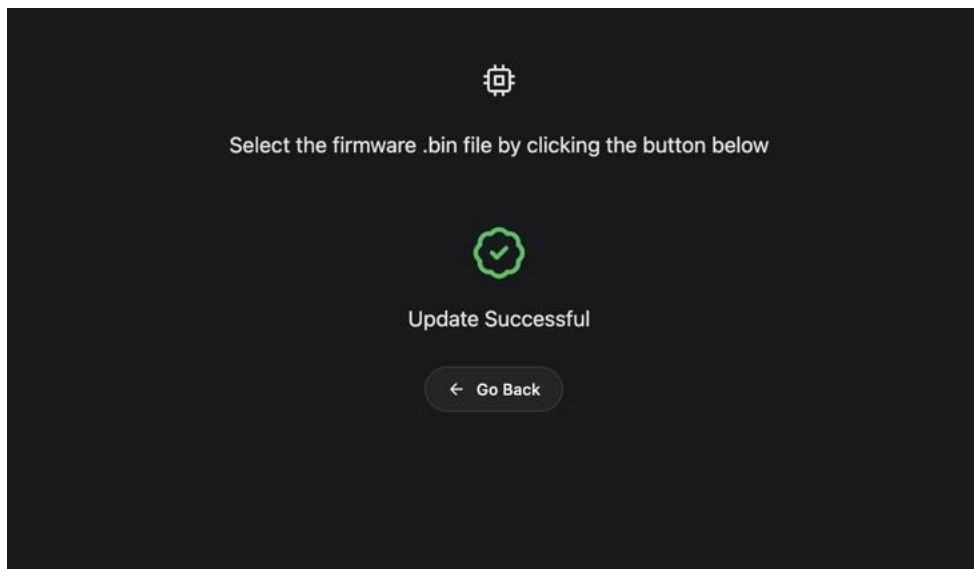

On success, mount will automatically reboot and you should hear the welcome melody confirming that the mount's firmware was loaded successfully.

! BEFORE FIRMWARE UPGRADE IT IS RECOMMENDED TO HAVE THE MOUNT PARKED OR AT HOME SO THAT RA AXIS BRAKE IS ENGAGED !

This update process is safe, and even if it fails, it will not brick the mount. Additionally, if you select an incorrect file or wrong revision, the mount will prevent you from proceeding with the update.